



System76 Gazelle Professional 9 mSATA SSD Replacement

How to replace an mSATA drive in a System76 GazP9

Written By: James Dearing





TOOLS:

- [Phillips #0 Screwdriver](#) (1)
-

Step 1 — mSATA SSD




- Disconnect the battery and power cord from the computer.

Step 2



- Remove the two 5mm screws near the front of the computer

Step 3

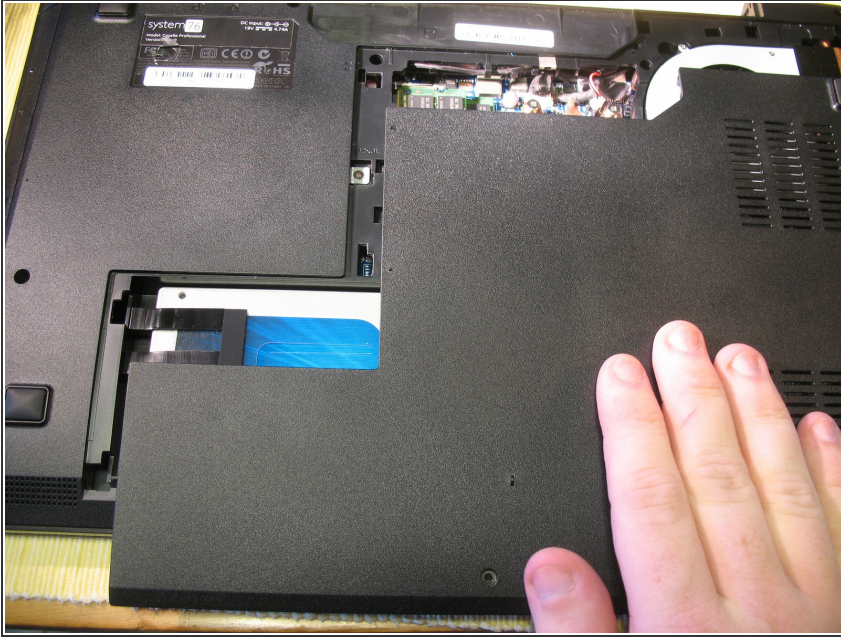

- Slide the panel towards the front of the computer; it will come off easily.

Step 4



- If you have not already, be sure to ground yourself before touching any internal parts.
- Remove the single 3mm screw holding down the SSD.

Step 5



- The drive will stick up slightly; gently remove it.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-21 06:57:21 PM.